




# CURVATUBI ETM76

- entirely made of steel, sturdy, precise and fast
- max tube bending capacity:  
Ø 76 mm tube with 3 mm thickness
- completely run and aided by an incorporated microprocessor which allows to store up to 40 different programmes, each of them with a 5-stop sequence in the bending operation
- minimum bending radius:  
2 times the Ø of the tube  
(varies according to the tube wall thickness and material)
- weight: 260 kg



**new**

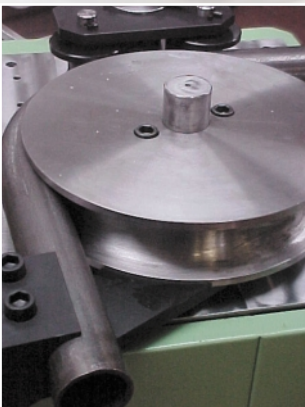

<b>MAXIMUM BENDING CAPACITY</b>		
Boiler tube	76 x 3	2.5" gas x 0.157"
Hydraulic steel	70 x 5	2.8" x 0.203"
Alluminium	76 x 6	3" x 0.236"
Round bar (mild steel)	45	1.8"
Square tube (mild steel)	50 x 50 x 5	2" x 2" x 0.203"

<b>TECHNICAL DATA</b>
Drive motor KW 400/240 V - Rotation speed = 7 revolutions per minute (50Hz)
Gear reduction driven in oil - Electronic device for angle control
Approximative weight: 260 Kg - Dimensions mm: base 850x620 height 980

All specifications may be subject to change without notice



MEMOLI s.a.s. - via Magellano - 20049 Concorezzo - Mi - Italy  
 Tel. ++39 039 6042210 - Fax ++39 039 648437  
 www.memoli.it - memoli@tin.it